

DK50 4VR/50



Six dental units

DK50 4VR/50
without soundproofing box ■

DK50 4VR/50S
with soundproofing box ■

DK50 4VR/50/M
without soundproofing box ■
with npsl dryer

DK50 4VR/50S/M
with soundproofing box ■
with npsl dryer

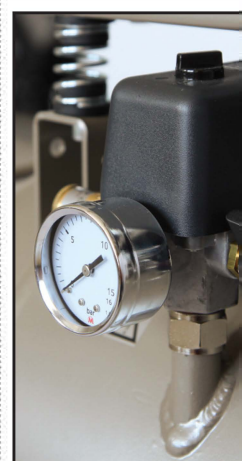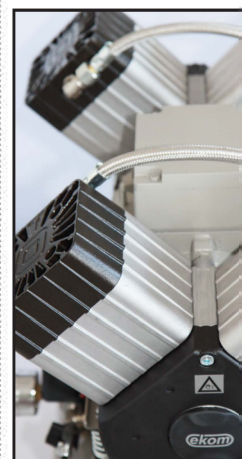

Technical specification	DK50 4VR/50	DK50 4VR/50/M
Nominal voltage / frequency	3x400V/ 50Hz	
Efficiency of compressor at over-pressure 6 bar	270 l.min ⁻¹ /5 bar	
Efficiency of compressor with dryer at over-pressure 6 bar	215 l.min ⁻¹ /5 bar *	
Motor performance	2,2 kW	
Air tank capacity	50 l	
Working pressure	6 - 8 bar	
Mode of operation	S1 - 100%	
Noise level	77 dB(A)	58 dB(A)
Weight	70 kg	120 kg
Weight with dryer	89 kg	139 kg
Dimensions (w x l x h)	580x580x795 mm	750x770x1015 mm
Dimensions with dryer (w x l x h)	585x635x795 mm	750x770x1015 mm

* Part of the efficiency of compressor is used for regeneration of the dryer.
Technical modifications are subject to change.